

PACIFIC

REAR SPARE TYRE BIKE CARRIER INSTRUCTIONS

Not for e-bikes




Max 15kg
per bike



The rack once removed from the box, is to be set up in the above position, and placed over the spare wheel of the vehicle as pictured above. Ensure the spare tyre of the car fits completely into the rectangular bar of the rack. Wrap the retaining strap around the underside of the spare tyre and pull it tight, securing the rack to the tyre. A knot can be tied in both ends of the strap for additional security as pictured below.



There are three straps along the bottom bar of the rack. The middle of these straps is used to secure the bottom of the rack to a suitable anchor point on the vehicle. A knot can be tied in the excess strap as above for additional security.

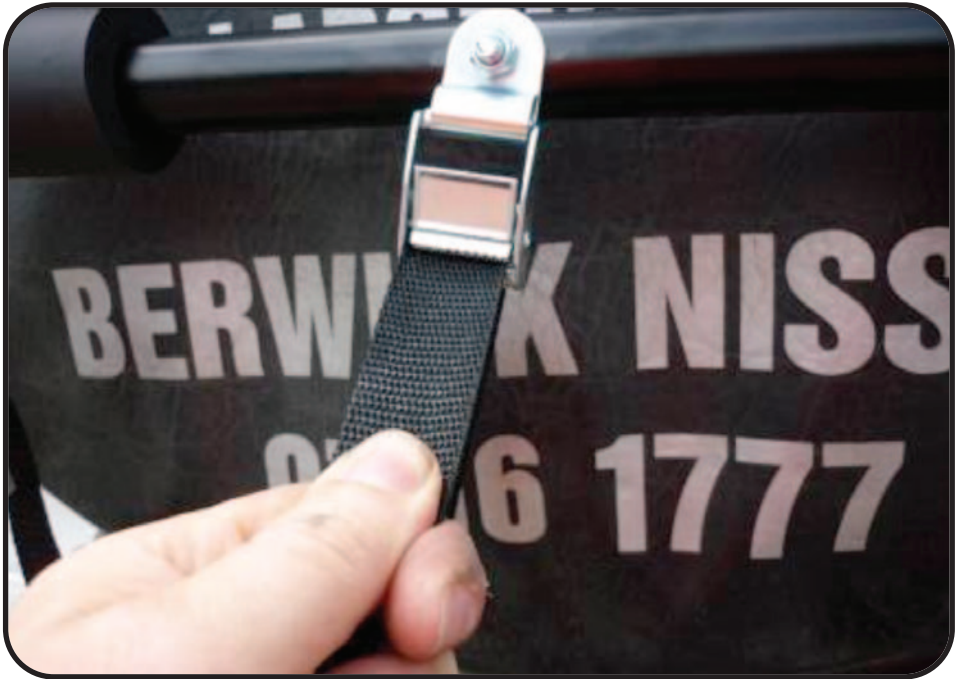

The remaining two straps can be used to secure the bikes to the rack once they are positioned in the cradles. Check the straps for wear and tear each time the rack is used. Ensure your vehicle's number plate is not obscured by the rack or the bicycles. If it is not clearly visible, ask your retailer about mounting your number plate to a rack mount with tail and brake light. (Available separately)