



GPS G1 **USER MANUAL**



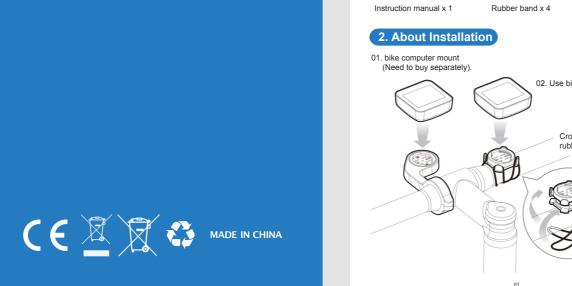

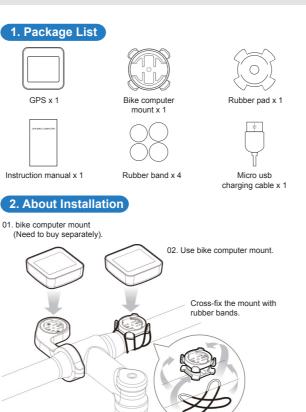


3. Specifications



4. About Function

- 01. Support GPS speed measurement, display Current/Max/Average Speed.
- 02. Display Riding Time, Distance, Total Riding Time, ODO, Time Zone, Altitude.
- 03. Support setting ODO, Time Zone, Unit and Restoring Factory Settings.
- 04. Device will automatically enter sleep mode after 10 minutes of inactivity, it will display your last cycling data when you turn it on.





5. About Buttons

			Power button ()	Setting button (5)
	Off state	Short press	Turn on	
	On state	Short press	Switch Current/Average/ Max Speed	Switch Time/Distance/Total Time/ Odometer/Clock/Altitude
	On state	Long press	Turn off	Enter/Exit setting

6. About Settings

There are 4 menus in settings (C4, C6, C7, C8). In the display mode, long press the setting button to enter the setting mode. Short press the setting button to select setting menus. After setting, long press the setting button to return to the main menu.

Power on, long press the setting button to enter the setting mode









Short press the power button to enter the setting mode



Short press the setting button to edit the setting

Short press the power button to confirm the setting

the main menu

Long press the setting button to return to

01.Time zone setting (C4)

After the screen displays C4, short press power button to confirm. The display will blink, then short press setting button to change the value and press power button to confirm.

02. Unit setting (C6)

After the screen displays C6, short press power button to confirm. The display will blink, then short press setting button to select the unit and short press the power button to confirm.

03.Factory reset (C7)

After the screen displays C7, short press power button to confirm. After RECOVER starts blinking, press the setting button twice, the screen starts flashing, and it will automatically return to the display interface after three flashes. 04. Odometer setting (C8)

After screen displays C8, short press the power button to confirm. After the number starts blinking, press the setting button to select the data fields and press the power button to confirm.